



THE QUIETEST IN THE WORLD



LOW WEIGHT AND SIZE




AWARD-WINNING PRODUCT FOR THE USE OF STRENX ULTRA-LIGHT HIGH-STRENGTH STEELS



Watch the video




AWARD-WINNING PRODUCT FOR THE USE OF STRENX ULTRA-LIGHT HIGH-STRENGTH STEELS

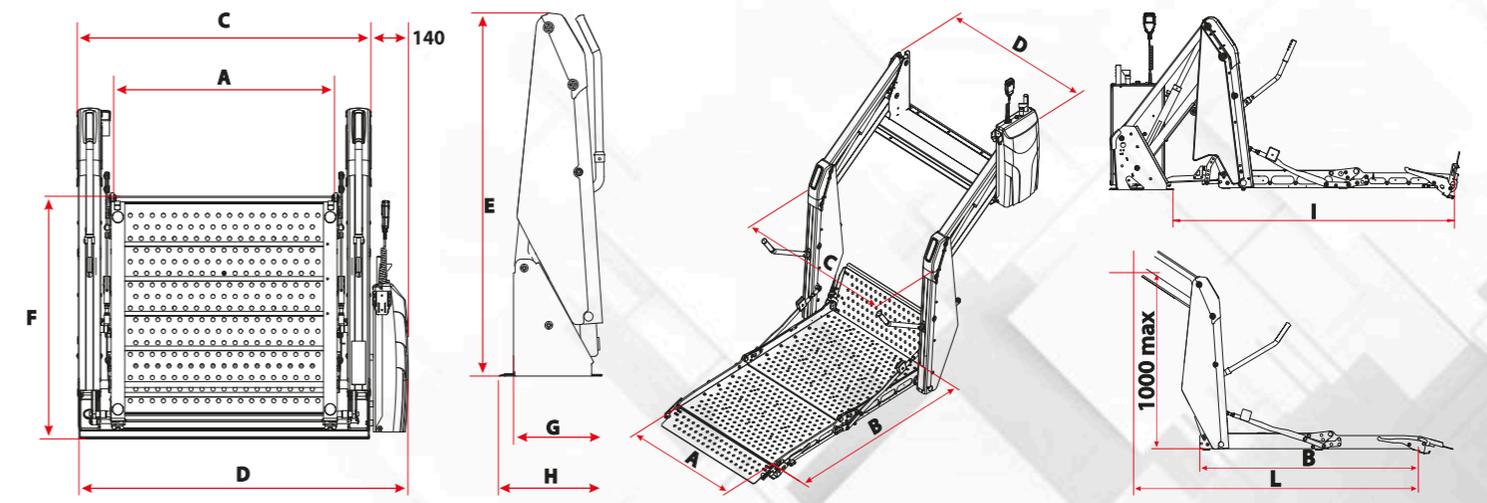

Available sizes (mm)													Peso a secco (Kg)
	Cod.	Cod. led	A	B	C	D	E	F	G	H	I	L	
LIGHT-LIFT-BP-72x115	106001	106001	720	1150	970	1108	1140	772	320	320	1450	1750	99
LIGHT-LIFT-BP-80x130	106002	106004	800	1300	1055	1250	1550	815	335	335	1590	1875	106
LIGHT-LIFT-BP-80x130 SA*	106014	106015	800	1300	1055	1250	1150	815	335	335	1590	1875	110

*SA means 75mm edge barrier

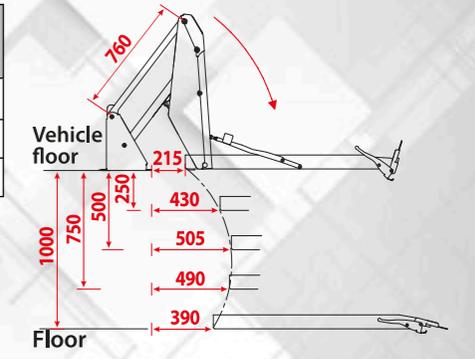

LIGHT-LIFT-BP Capacity 350 kg

It can be installed inside vehicles like vans, minivans and minibuses, and allows to overcome the difference in level between the road surface and the vehicle floor, a valid aid for people with disabilities or for the normal loading and unloading of goods. The maximum lift capacity of the BP lift is 350 kg. In the event of electrical faults, a manually operated emergency system guarantees the basic operation of the lift. The lift on the road surface protrudes from the vehicle by only 175 cm or 187 cm depending on the version.

REDUCED WEIGHT
The frame built with special high-strength steel and the walking surface made of aluminum, guarantee the structure strength and the reduction of the total weight of the lifter contained in just 99 Kg. Less weight means less fuel consumption.

ANTI-SLIP FLOOR
The walking surface in aluminum is punched making it sturdy and non-slip, folded it does not create impediments to the visibility.

MINIMUM SIZE
When closed it has a footprint of only 32 cm, the minimum protrusion towards the outside allows its installation close to the tailgate without interfering with the bumper during its movement.

EASY TO USE
The loading and unloading operations are performed with two keys.